

Technical Specifications

Ethernet	2x RJ45 Ethernet ports with activity LEDs Supports 10/100/1000Base-T Ethernet over Cat3/4/5 (10 Mbps) or Cat5 (100/1000 Mbps) Auto-negotiation for 10/100/1000 Mbps Optional forced 10 Mbps mode per port Automatic or manual MDI/MDI-X crossover configuration per port Cabling up to 100 m / 328 ft
Fiber	1x fiber input, 1x fiber output Duplex LC/PC connectors Single-mode Standard 1310nm, Multi-mode or CWDM IEEE 802.3z 1000BASE-X Gbit/s Ethernet over Fiber at 1Gbit/s (125 MB/s) TX and RX active LEDs on side of module
Power	+12V DC @ 4.7W nominal - (supports 7 - 22V DC input range) 1x Power LED on side of module
Physical	Size: 140mm x 42mm x 22mm (5.51" x 1.65" x 0.86") incl. connectors Weight: 125g (4.4oz)
Includes	Module, AC power supply, SFP depending on model

Ordering Information

Model	Mode	Type	TX Wavelength	SFP Included
OET 1514	Single	Standard	1310nm	Yes
OET 1514 MM	Multi	SR	850nm	Yes
OET 1514 CW	Single	CWDM	1270 - 1610nm	No



WARNING
CLASS 1M LASER PRODUCT
LASER RADIATION


Do not view directly with optical instruments

Visit our website for the latest product updates: www.lynx-technik.com

LYNXTechnik | Broadcast Television Equipment

OET 1514

1GbE to Fiber Transceiver (switch)

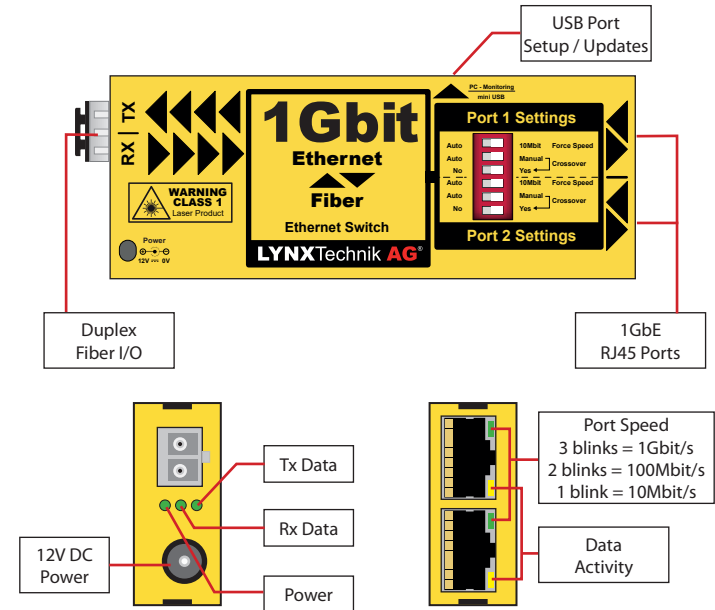

The OET 1514 is a compact three-port Ethernet switch with two RJ45 ports and one fiber connection, extending 10/100/1000 Ethernet over a 1 Gbit/s optical link. It supports auto-negotiation or fixed 10 Mbit/s operation, configurable via DIP switches. It is compatible with Standard 1310nm single-mode, multi-mode, and CWDM SFPs.

Connections

The module functions as a 3-port Ethernet switch, featuring two RJ45 electrical Ethernet ports and one SFP port for duplex fiber connectivity.

To protect the optical interface from dust and contamination, keep the supplied dust plug installed whenever the fiber connection is not in use.
A USB port is provided for firmware updates, configuration, and monitoring. Firmware updates are provided free of charge via yelloGUI and Lynx Central.

Operation

The module maintains a constant fiber communication speed independent of the two electrical Ethernet ports. Each electrical port can be independently configured via DIP switch settings, enabling flexible integration with mixed-speed or legacy networks.
Electrical port speed can be set to auto-negotiation (10/100/1000 Mbit/s) or forced to 10 Mbit/s when required. Auto MDI/MDI-X crossover is supported, with optional manual crossover mode for compatibility with older network equipment.

Module LEDs

Power LED	
	Device Running
	“Locate Module” function active
	Hardware Issues
	Device Not Powered
TX LED	
	Output Signal Active
	No Input Signal Detected, No Signal Transmitted (Laser Active)
RX LED	
	Valid Signal Received
	Incompatible Input Signal
	No Signal Detected

Distances


- OET 1514 Single-mode Standard 1310nm: up to 10km (12 miles)
- OET 1514 MM Multi-mode: up to 550m (1800 feet)
- OET 1514 CW Single-mode CWDM: up to 40/80km (25/50 miles)

Power

The module requires a 12V DC power input. The LED indicates when power is connected. If using an external power supply, a clean 7–22V DC source is required.
The OET 1514 has a power consumption of 1.7W (including SFP).

Power Lead Strain Relief

Yellobrik modules have a small hole above the power connection to prevent the power lead from being accidentally pulled out. Secure the lead using the supplied tie-wrap as shown below.

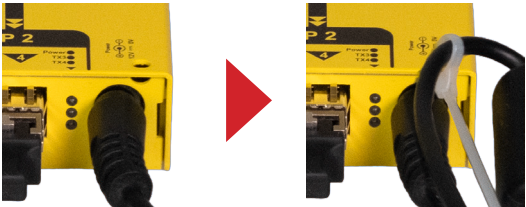

Optional Mounting Solutions



The optional RFR 1001 mounting bracket allows the module to be installed on any surface and 19” rack rails.

The RFR 1200 rack frame can hold up to 14 yellobriks and can provide power redundancy for all installed devices.

